

## ◆ Specifications

### Single Door

External Dimensions(mm)			enclosures				Mounting plate	Mounting plate adjustable supports
Height (A)	Width (B)	Depth (C)	Model	Figure	Flange Opening Type	Approx*. Weigh (kg)	metal	
250	200	150	FT-2520/150	1	O	3, 2	●	
300	250	150	FT-3025/150	1	A	4, 2	●	
300	250	200	FT-3025/200	1	A	4, 9	●	●
300	300	150	FT-33/150	1	B	5	●	
300	300	200	FT-33/200	1	B	6	●	●
400	300	150	FT-43/150	1	B	6	●	
400	300	200	FT-43/200	1	B	6, 8	●	●
400	400	200	FT-44/200	1	C	8	●	●
400	600	250	FT-46/250	1	D	10	●	●
400	600	300	FT-46/300	1	D	11, 2	●	●
500	400	150	FT-54/150	2	B	8, 7	●	
500	400	200	FT-54/200	2	C	9, 8	●	●
500	400	250	FT-54/250	2	C	11	●	●
500	500	250	FT-55/250	2	D	12, 8	●	●
600	400	150	FT-64/150	2	B	9, 3	●	
600	400	200	FT-64/200	2	C	10, 8	●	●
600	400	250	FT-64/250	2	C	12, 3	●	●
600	500	150	FT-65/150	2	B	11, 3	●	
600	500	200	FT-65/200	2	D	14, 3	●	●
600	500	250	FT-65/250	2	D	16, 3	●	●
600	600	250	FT-66/250	2	D	18, 2	●	●
600	600	300	FT-66/300	2	D	19, 8	●	●
700	500	200	FT-75/200	2	D	17, 3	●	●
700	500	250	FT-75/250	2	D	19, 3	●	●
800	600	200	FT-86/200	2	D	21, 8	●	●
800	600	250	FT-86/250	2	D	24, 8	●	●
800	600	300	FT-86/300	2	D	26, 3	●	●
800	800	200	FT-88/200	2	E	29, 5	●	●
800	800	300	FT-88/300	2	E	32, 5	●	●
1000	600	250	FT-106/250	3	D	28, 4	●	●
1000	600	300	FT-106/300	3	D	30, 6	●	●
1000	800	250	FT-108/250	3	E	34, 5	●	●
1000	800	300	FT-108/300	3	E	37, 4	●	●
1000	1000	300	FT-1010/300**	4	F	46, 7	●	●
1200	800	300	FT-128/300**	3	F	44, 8	●	●
1200	1000	300	FT-1210/300**	4	F	53, 4	●	●

### Double Door

External Dimensions(mm)			Mounting plate	19" RAC swing frame	Internal doors
Height (A)	Width (B)	Depth (C)	metal		
1000	1000	300	●		●
1200	800	300	●		●
1200	1000	300	●		●
1200	1200	400	●		●
1400	800	400	●	●	●
1600	800	300	●	●	●
1600	800	400	●	●	●
1600	1000	200	●		●
1600	1000	400	●		●
1600	1000	400	●		●
1300	1200	300	●		●
1600	1200	400	●		●
1800	800	400	●	●	●
1800	1200	400	●		●
1800	1600	400	●		●
2000	800	400	●		●
2000	1000	400	●	●	●
2000	1200	400	●		●

Double Door

## ■ Wall Mounting Industrial Enclosure

## ◆ Construction

- ◇ Body and door manufactured in 1.2 to 1.5mm steel sheet
- ◇ Flat mounting plate in 1.5mm steel sheet
- FINISH
- MF standard cycle thermosetting epoxy polyester powder coating
- ◇ Body and door painted to RAL 7032
- ◇ Mounting plate in RAL 2004 smooth finish
- PROTECTION DEGREE
- IP65** to EN60 529 NEMA4
- PACKING
- Boxes are complete with:
- ◇ Mounting plate
- ◇ Gland plate and gasket
- ◇ Wall fixing brackets and screws
- ◇ Locking round bar key

## ◆ Dimensions

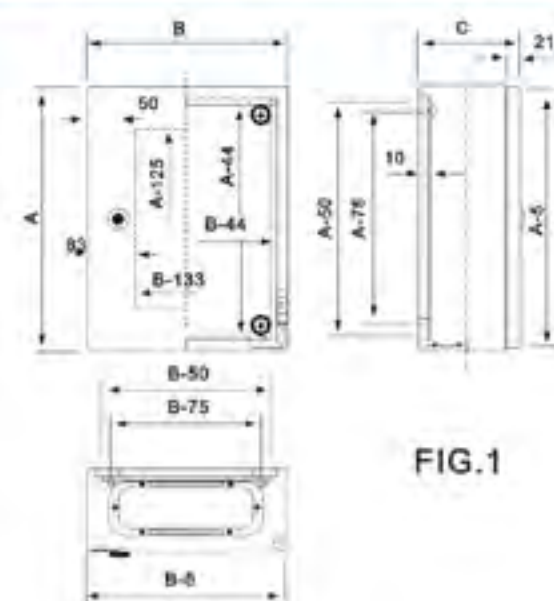


FIG.1

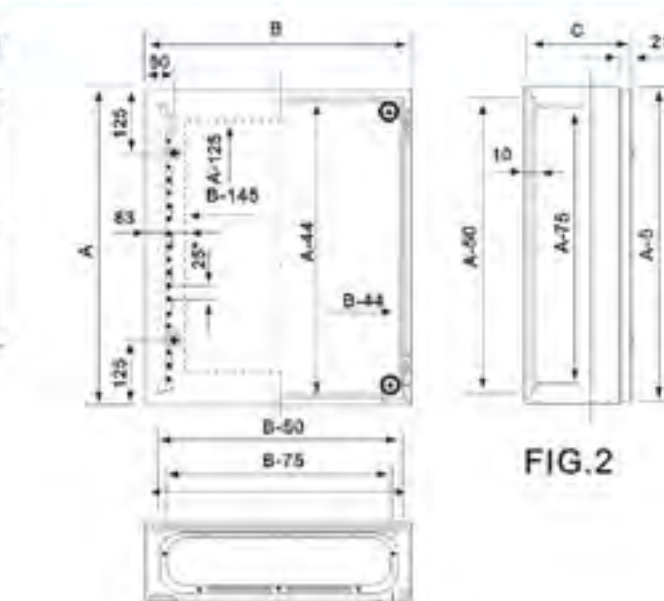


FIG.2

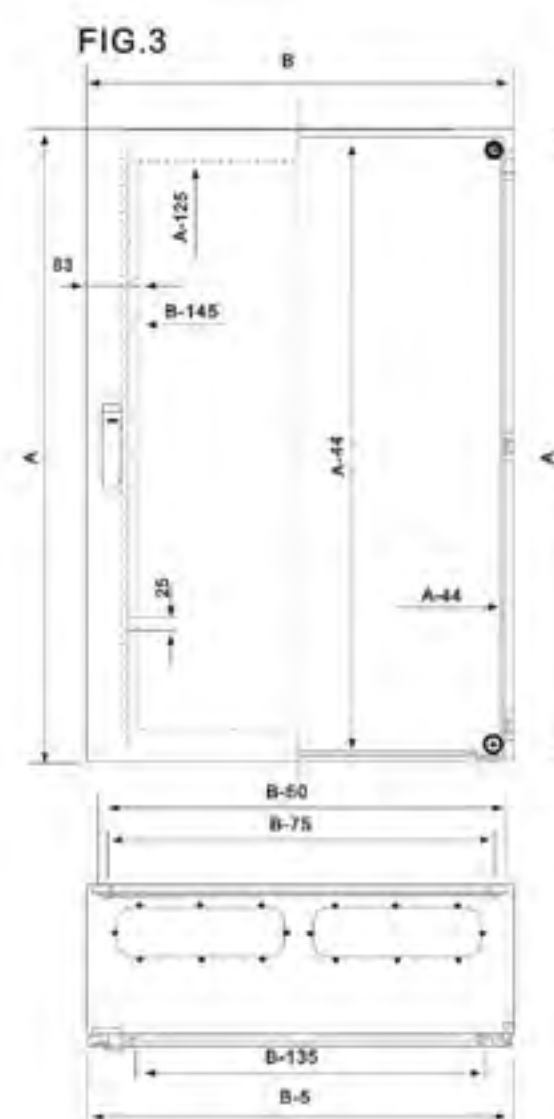


FIG.3


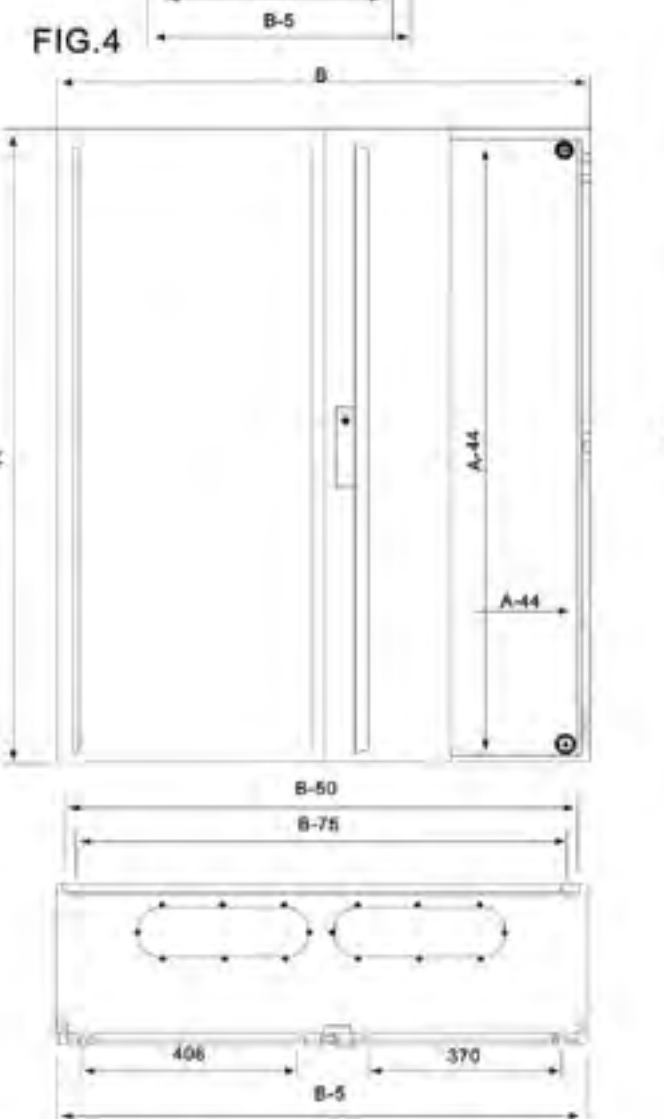


FIG.4



Detail of recessed cable gland plate ensuring a flat surface (except models FT-1010/300 FT-128/300 and FT-1210/300)

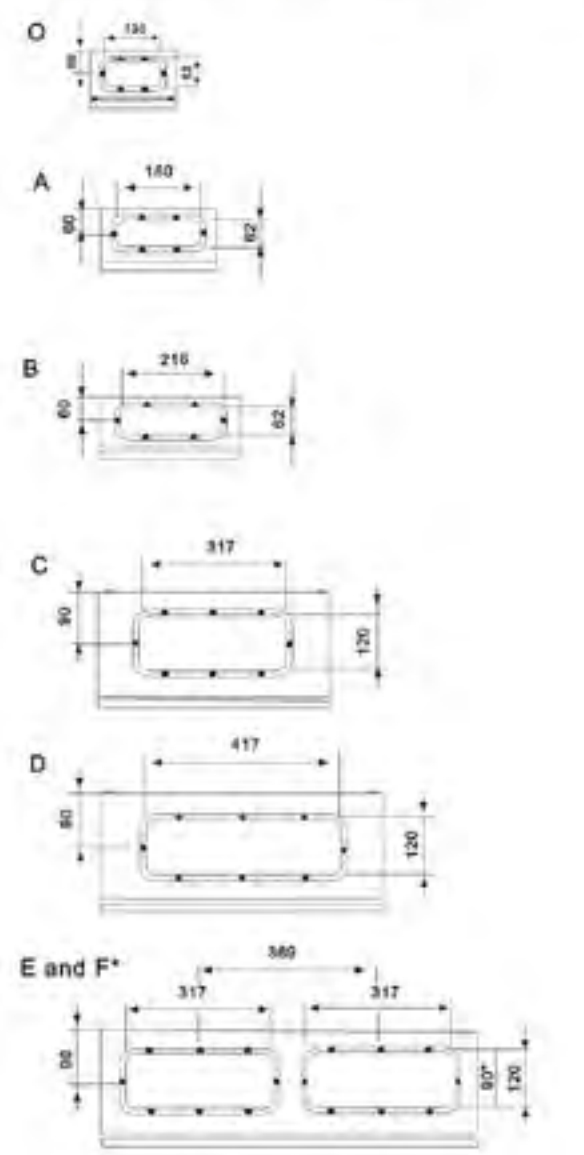

\*Model 1010 and 128