

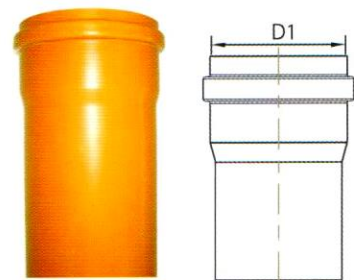


BELOW GROUND UPVC DRAINAGE PIPES BS EN 1401 (Supercedes BS 4660 & BS 5481)

Below Ground Pipes : BS EN 1401-1 : 1998.

Sr.	Nominal Size DN / OD	Mean Outside Dia (D1)		Wall Thickness	
		Min	Max	Min	Max
1	110mm (4")	110	110.3	3.2	3.8
2	160mm (6")	160	160.4	3.2	3.8
3	160mm (6")	160	160.4	4.0	4.6
4	200mm (8")	200	200.5	3.9	4.5
5	200mm (8")	200	200.5	4.9	5.6
6	250mm (10")	250	250.5	4.9	5.6
7	250mm (10")	250	250.5	6.2	7.1






BELOW GROUND UPVC DRAINAGE FITTING BS EN 1401 (Supercedes BS 4660 & BS 5481)



UD "Y" 45° Female / Female

Rubber Ring


Size	D	DI	L
110mm (4")	110	-	40
160mm (6")	160	-	60
200mm (8")	200	-	61



UD DOUBLE "Y" 45° Female / Female

Rubber Ring


Size	D	DI	L
110mm (4")	110	-	40



UD DOUBLE "Y" 45° Male / Female

Rubber Ring


Size	D	DI	L
110mm (4")	110	110	40




UD TEE 87.5° Female / Female

Rubber Ring

Size	D	DI	L
110mm (4")	110	-	40
160mm (6")	160	-	60
200mm (8")	200	-	61






UD DOUBLE Tee 87.5° Male / Female

Rubber Ring


Size	D	DI	L
110mm (4")	110	110	40



UD DOUBLE Tee 87.5° Female / Female

Rubber Ring


Size	D	DI	L
110mm (4")	110	110	40



UD BEND 87.5° Female / Female

Rubber Ring


Size	D	DI	L
110mm (4")	110	-	40
160mm (6")	160	-	60
200mm (8")	200	-	61



UD BEND 45° Female / Female

Rubber Ring


Size	D	DI	L
110mm (4")	110	-	40
160mm (6")	160	-	60
200mm (8")	200	-	61



UD COUPLER Female / Female

Rubber Ring

Size	D	DI	L
110mm (4")	110	-	40
160mm (6")	160	-	60
200mm (8")	200	-	61



UD P-TRAP

Rubber Ring

Size	D	DI	L
110mm (4")	110	110	85

