

LED Features:

- CREE XLAMP XPG2 LEDS with high efficacy >100 Lm/W
- Optional integrated infrared motion sensor
- Optional stepping levels: 0%, 10%, 30%, 60% or 100%
- Optional dusk to dawn photocell - top knockout
- Patented heat dissipation for optimal efficiency
- National listing lab tested with IES standards
- Available in 11 IES light distributions
- Excellent optical presentation for wall pack lighting
- Solid State with high-shock and vibration resistance
- Instant on and off without delay or re-strike
- Die-cast aluminum housing with custom colors
- Modular design for easy maintenance or upgrade
- High CRI - RA>75 enhances all original colors
- Philips Xitanium Class I 0-10V Dimming Power Supply
- Contains no mercury or lead and cool to the touch
- No infrared or UV radiation - reduced insects
- Operating Temperature: -40 to 55 degrees celsius
- 100,000 hour LED life
- 5 year system warranty
- CE, FCC, RoHS, cUL, UL, CSA - IP65 rated

Wall Mount Vega WP Series




LED POWERED BY:
CREE



Models:

- VVDWP14: 14 LEDS - 33W - 3100 Lm - 10.4"(L) - 18.7 lbs
- VVDWP28: 28 LEDS - 62W - 5800 Lm - 12.8"(L) - 20.3 lbs
- VVDWP42: 42 LEDS - 93W - 8800 Lm - 15.3"(L) - 22.7 lbs

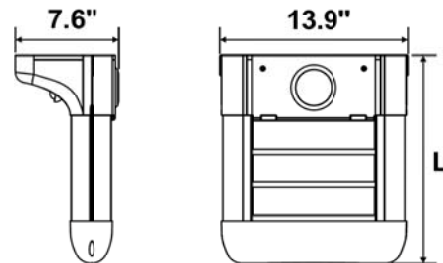

Accessories:*

- PC - Photocell
- MS - Infrared Motion Sensor

Ordering: moq = 2 Units

Part #	Color Temp	Lens Type	Voltage	Case Color	Dimming
VVDWP14	W - 2700-3300K	S1M1 - 150 x 90 - Type I Medium	V27 - 100-277V	BK - Black	ND - No Dim
VVDWP28	N - 3700-4300K	S1S1 - 95 x 85 - Type I Short	V48 - 347-480V**	SG - Silver Gray	D1 - 0-10V Dim
VVDWP42	P - 4700-5300K	S1S2 - 95 x 85 - Type I Short Anti-Glare	D12 - 12V DC	WT - White	DL - Dali
	C - 5700-5500K	A2M1 - 150 x 75 - Type II Medium	D24 - 24V DC	BZ - Bronze	PD - Program Dim
	CS - Custom	A2M3 - 145 x 65 - Type II Medium		CS - Custom	(Specify Time Schedule)
	(Specify Kelvin/Nm)	A3L2 - 155 x 100 - Type III Long			(Specify Pantone/RAL)
		A3M2 - 145 x 45 - Type III Medium			
		S5M1 - 75 Degree - Type V Medium			
		S5N2 - 18 Degree - Type V Narrow			
		S5W2 - 145 Degree - Type V Wide			
		S7M1 - 130 x 30 - Type VII Medium			

Ordering Example:
 VVDWP14-N-S1M1-V27-BK-ND



*Adder Applies
 **CSA & cUL Listed 62W - 308W Only