

WPX Weatherproof Lights

APPLICATIONS



Housing

Choice of 2 models in Corrosion and water resistant material.

ABS Thermo compressed

PC Polycarbonate

Diffuser

PC UV stabilized polycarbonate diffuser.

A UV stabilized acrylic PMMA.

Gasket

Non ageing, single piece polyurethane/neoprene gasket, that ensures total IP-65 protection.

Clips

P High performance Three part plastic clips that lock the diffuser tightly in place.

S Stainless steel clip.

Protection

IP: 65

Ballasts

Energy Control Ballasts are from world's leading manufactures, meeting current European standards.

Wires

Heat resistant wires to 105 deg C.

Options



ECK - Emergency battery pack

HF - Electronic ballast

RF - Radio Interference capacitor

HPF - Power factor reduction capacitor

Dimension & Technical Details

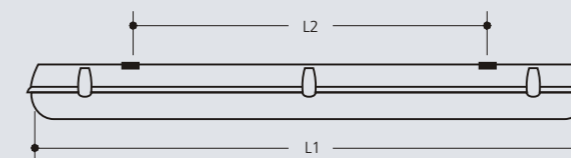

TYPE	LAMP	H	L1	L2	W
WPX 118	1X18W T8	90	660	350	86
WPX 136	1X36W T8	90	1270	900	86
WPX 158	1X58W T8	90	1575	1200	86
WPX 218	2X18W T8	90	660	350	136
WPX 236	2X36W T8	90	1270	900	136
WPX 258	2X58W T8	90	1575	1200	136

All Dimensions in MM

