










Bollards


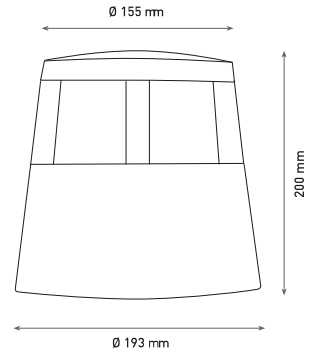
	601000 HYDROPHARO	page. 192
	602000 HYDROPATH	page. 195
	603000 HYDROWAY	page. 198
	604000 HYDROLANE	page. 200
	605000 HYDROSIDE	page. 203
	606000 HYDROPLATE	page. 205
	607000 HYDROWALK	page. 207





601001 HYDROPHARO 01 - FLUO GX24D-2

Low height bollard, round shape, for outdoor surface installation, phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, vandal-proof polycarbonate diffuser, moulded silicone gasket and stainless steel screws. Single light emission 180°. Built-in transformer 230V 50Hz, Gx24d-2 18W compact fluorescent. IP65 rating.

- Material: high corrosion resistance die-cast copper-free aluminum body
- Coating: polyester powder coating with phosphochromating pre-finish
- Stainless steel screws
- Silicone rubber gasket
- Polycarbonate diffuser vandal-proof
- TC-T Gx24d-2 18W
- Protection against impact IK09 (10 joule)
- Double PG 13.5 cable gland.

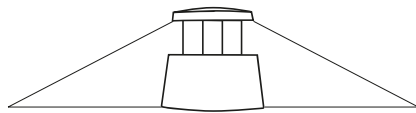
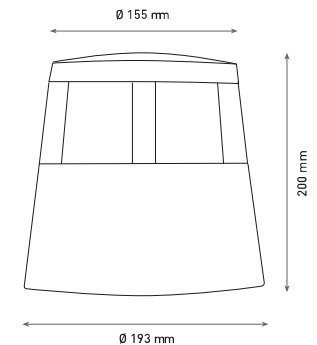




	LIGHT SOURCE	LIGHT COLOR	LIGHT BEAM OPTIONS	COLORS OPTIONS
18 WATT 230V 50HZ IP65 3.50 KG UNIT GROSS WEIGHT	TC-T GX24D-2 18W	SEE BULB FEATURES	 180° LIGHT DISTRIBUTION	 TEXTURED GREY

601002 HYDROPHARO 02 - FLUO GX24D-2

Low height bollard, round shape, for outdoor surface installation, phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, vandal-proof polycarbonate diffuser, moulded silicone gasket and stainless steel screws. Double light emission 2 x 90°. Built-in transformer 220-240V 50-60Hz, Gx24d-2 18W compact fluorescent. IP65 rating.

- Material: high corrosion resistance die-cast copper-free aluminum body
- Coating: polyester powder coating with phosphochromating pre-finish
- Stainless steel screws
- Silicone rubber gasket
- Polycarbonate diffuser vandal-proof
- TC-T Gx24d-2 18W
- Electronic ballast 220-240V 50-60Hz
- Protection against impact IK09 (10 joule)
- Double PG 13.5 cable gland.




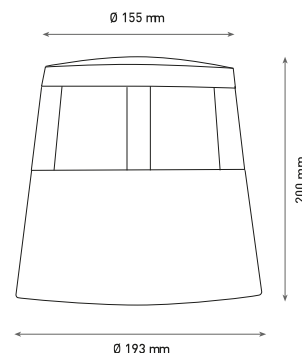
	LIGHT SOURCE	LIGHT COLOR	LIGHT BEAM OPTIONS	COLORS OPTIONS
18 WATT 220-240V 50-60HZ IP65 3.50 KG UNIT GROSS WEIGHT	TC-T GX24D-2 18W	SEE BULB FEATURES	 2 X 90° LIGHT DISTRIBUTION	 TEXTURED GREY





601003 HYDROPHARO 04 - FLUO GX24D-2

Low height bollard, round shape, for outdoor surface installation, phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, vandal-proof polycarbonate diffuser, moulded silicone gasket and stainless steel screws. Full light emission 360°. Built-in transformer 220-240V 50-60Hz, Gx24d-2 18W compact fluorescent. IP65 rating.

- Material: high corrosion resistance die-cast copper-free aluminum body
- Coating: polyester powder coating with phosphochromating pre-finish
- Stainless steel screws
- Silicone rubber gasket
- Polycarbonate diffuser vandal-proof
- TC-T Gx24d-2 18W
- Electronic ballast 220-240V 50-60Hz
- Protection against impact IK09 (10 joule)
- Double PG 13,5 cable gland.

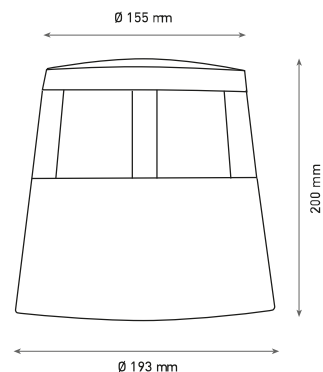




	LIGHT SOURCE	LIGHT COLOR	LIGHT BEAM OPTIONS	COLORS OPTIONS
18 WATT 220-240V 50-60HZ IP65 3,50 KG UNIT GROSS WEIGHT	TC-T GX24D-2 18W	SEE BULB FEATURES	 360° LIGHT DISTRIBUTION	 TEXTURED GREY

601004 HYDROPHARO 01 G8,5

Low height bollard, round shape, for outdoor surface installation, phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, vandal-proof polycarbonate diffuser, moulded silicone gasket and stainless steel screws. Single light emission 180°. Built-in electronic ballast 220-240V 50-60Hz, G8,5 20W metal halide. IP65 rating.

- Material: high corrosion resistance die-cast copper-free aluminum body
- Coating: polyester powder coating with phosphochromating pre-finish
- Stainless steel screws
- Silicone rubber gasket
- Polycarbonate diffuser vandal-proof
- HIT-TC CRI 20W G8,5
- Electronic ballast 220-240V 50-60Hz
- Protection against impact IK09 (10 joule)
- Double PG 13,5 cable gland.



	LIGHT SOURCE	LIGHT COLOR	LIGHT BEAM OPTIONS	COLORS OPTIONS
20 WATT 220-240V 50-60HZ IP65 3,50 KG UNIT GROSS WEIGHT	HIT-TC CRI 20W G8,5	SEE BULB FEATURES	 180° LIGHT DISTRIBUTION	 TEXTURED GREY