


### LED Features:

- Cree XLamp LEDs with high efficacy: >95 Lm/W
- Type V IES 120 degree beam angle
- Listed for wet locations - IP65
- Integrated one piece heatsink for better cooling
- Easy mount, contractor friendly mounting plate
- High quality, rugged die-cast aluminum housing
- Corrosion resistant coating
- Architectural bronze powdercoat finish
- Impact resistant sandblasted PC diffuser
- Silicone rubber gasket - No leakage
- Integrated cooling fin release for best heat dissipation
- Color Rendering Index: CRI RA>75
- Rated LED life: 100,000 hours
- High reflectance aluminum reflector
- Low Tj for long life and low lumen depreciation
- IC controlled LED circuits
- Low starting temperature: -40C
- Certifications: CE, RoHS, UL, cUL
- 5 year system warranty


# Garage / Canopy Design Canopy Series

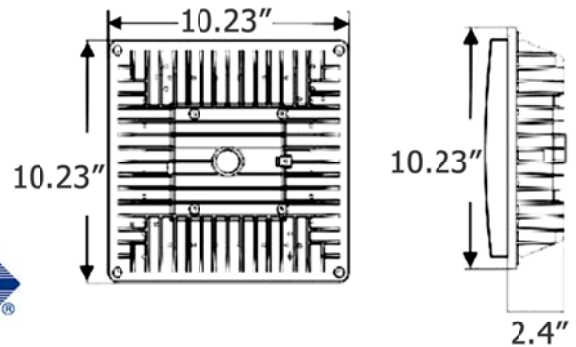

Contractor Friendly  
 Easy Mounting  
 Solution

### Distribution

Peak Intensity : 940 cd Located At Horizontal Angle = 270 , Vertical Angle = 180°

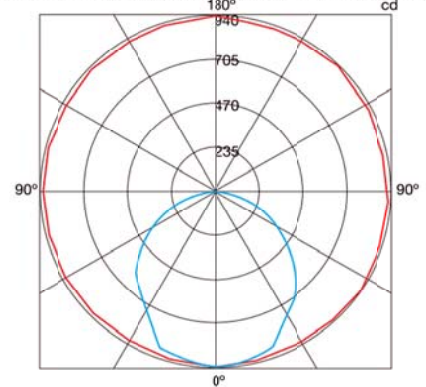

— (0° - 180°)  
 — Horizontal Cone Through Vertical Angle

### Models:

- VVD36433FR: 1 COB LED - 33W - 5000K - 2976 Lm - 830mA - 120-277 VAC
- VVD36458FR: 1 COB LED - 58W - 5000K - 5524 Lm - 1400mA - 120-277 VAC

Ordering Example: VVD36433FR

