


LED Recessed PanelLight

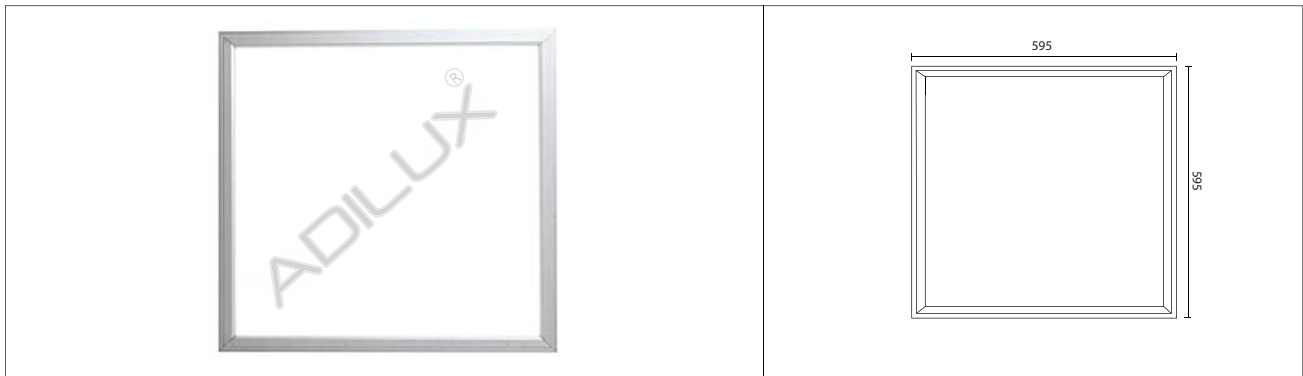

Code	Description	Dimension (mm)	LED	IP-44	Beam Angle
ADLPLED40WW	40W LED Recessed Panel Light Warm White	L595-W595-H10	3000K	CE	120°
ADLPLED40CW	40W LED Recessed Panel Light Cool White	L595-W595-H10	4000K	F	120°
ADLPLED40DL	40W LED Recessed Panel Light Day Light	L595-W595-H10	6500K		120°

LUMINAIRE DETAILS:

HOUSING:

Body made of Pretreated Diecast Aluminium, painted with white epoxy polyester powder coated

OPTICS:

Polycarbonate Micro-prismatic diffuser

WIRING:

Internal wiring - PVC insulated single conductor wire
105°C heat resistant

CONTROL GEAR / TRANSFORMER DETAIL:

LED Converter: 110~265V 50~60Hz Driver Included
Option: Suitable for Dimming & Emergency Lighting

MOUNTING:

Recessed / Surface / Suspended

LAMP DETAILS:

LED Module: Epister

Wattage: 40W

Minimum Luminous Flux : 3700lm

Beam Angle: 120°

Colour Temperature: 3000K ~ 6500K

Colour Rendering Index: CRI>80

Life Time: 50000 Hours

APPLICATIONS:

Offices
Conference Rooms
Kitchens
Bathrooms
Restaurants & Cafeterias
Health Care Institutes
Hospital & Laboratories
Service Areas

