

Features:


- XSite round flat top LED bollard
- Samsung LED module with excellent CRI: >83
- A360 extruded aluminum ingot housing with flush mount base
- Rust free, vandal-resistant, stainless nickle-plated screws
- Dupont powdercoat finish over a chromate conversion coating
- Internal ballast tray for easy maintenance
- Clear Lexan polycarbonate lens for durability and clarity
- Fast turn on, no warm up or cold start problems
- Type V cast aluminum louvers
- Mounting kit with 8" anchor bolts included
- Bollards can be cut to custom lengths upon request
- Contains no mercury or lead and cool to the touch
- No infrared or UV radiation - reduced insects
- 1x2 MacAdam Ellipse color specification
- Operating temperature: -40 to +80 C
- CSA: Listed for wet locations - IP66
- 100,000 hour lamp lifespan
- Certifications: CSA, CE, RoHS
- 5 year system warranty

XSite Bollard Series

Ground Mounted with Plate and Bolts
LED Surface Mount Luminaire

LED POWERED BY:


SAMSUNG



BOLP



BOL4-15

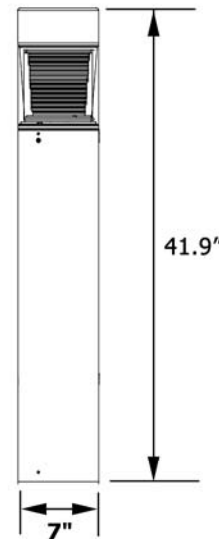

Models:

- WDBOFLFR - 1 LED - 15W - 2089 Lm

➔ **Ordering:** Ordering Example: WDBOFLFR-P-S5-UNV-BZ

Part #	Color Temp	Lens Type	Voltage	Housing Color
WDBOFLFR	P - 5000K	S5 - Type V	UNV - 120-277V	BZ - Bronze WH - White BK - Black

Accessories*

- BOL4 - Mounting Bracket & (3) 4" Bolts
- BOL8 - Mounting Bracket & (3) 8" Bolts
- BOL12 - Mounting Bracket & (3) 12" Bolts
- BOL15 - Mounting Bracket & (3) 15" Bolts
- BOLP - Replacement Polycarbonate Lens
- SP - 2.5KV Surge Protection

*Adder Applies

