


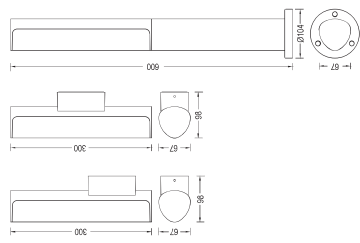



New Design

Material	Aluminium/PC
Voltage	110-240V/50-60Hz
LED Watt	9W
LED Type	SMD 2835
LEDs	EPISTAR
Driver	eachLine
Beam Angle	120°
LED Color	3000K/4000K/6000K
Safety Class	Class I  
IP Rating	IP54 



1131








1132



1133

New Design

Material	Aluminium/glass
Voltage	110-240V/50-60Hz
LED Watt	1121: 12W 1122: 6W
LED Type	1121: SMD 2835 1122: SMD 3535
LEDs	1121: EPISTAR 1122: BRIDGELUX
Driver	eachLine
Lumens (3000K)	1121: 660 lm 1122: 378 lm
Beam Angle	1121: 120° 1122: 60°
LED Color	3000K/4000K/6000K
Safety Class	Class I  
IP Rating	IP54  

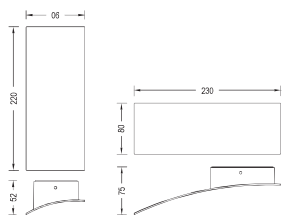

1121





1122




New Design

Material	1204/1206: Aluminium/glass 1205: Aluminium/lens
Voltage	110~240V/50~60Hz
LED Watt	1204/1205: 2x3W 1206: 1x3W
LED Type	SMD 3535
LEDs	BRIDGELUX
Driver	eadLumex
Lumens (3000K)	1204: 260 lm 1205: 180 lm 1206: 100 lm
Beam Angle	1204/1206: 80° 1205: 57/80°
LED Color	3000K/4000K/6000K
Safety Class	Class I CE
IP Rating	IP54



Adjustable 360°


Material	Aluminium/glass
Voltage	110~240V/50~60Hz
LED Watt	10W
LED Type	SMD 2835
LEDs	EPISTAR
Driver	eadLumex
Lumens (3000K)	495 lm
Beam Angle	120°
LED Color	3000K/4000K/6000K
Safety Class	Class I CE
IP Rating	IP54







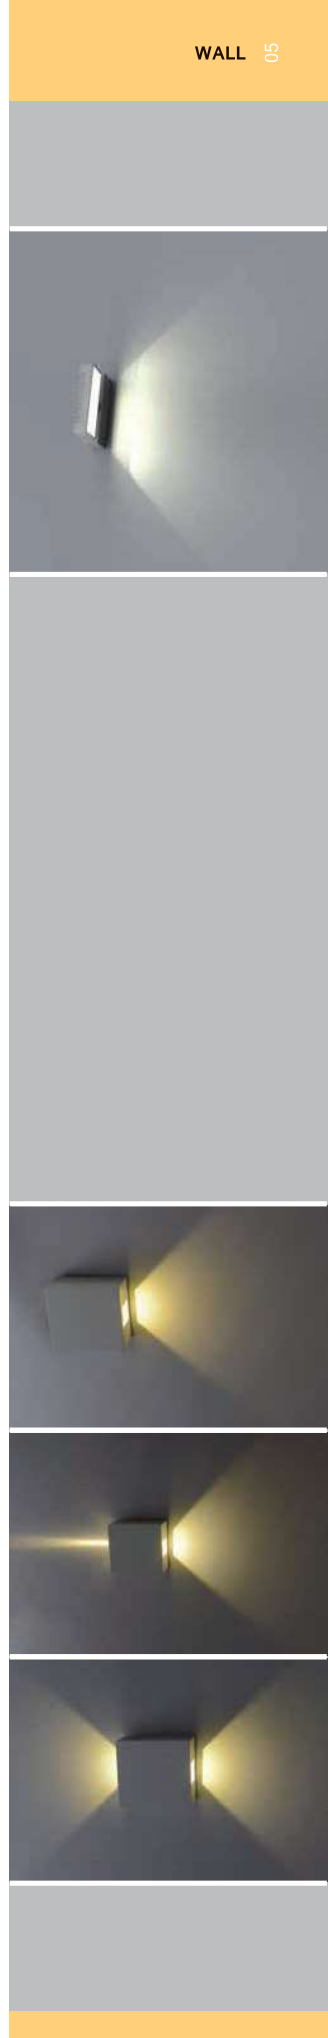

1113




1114



New Design







Material	Aluminium/PC
Voltage	110-240V/50-60Hz
LED Watt	8W
LED Type	SMD 3030
LEDs	BRIDGELUX
Driver	rac ² Drive
Lumens (3000K)	480 lm
Beam Angle	110°
LED Color	3000K/4000K/6000K
Safety Class	Class I   
IP Rating	IP54   




1111



1112


Material	Aluminium/glass
Voltage	110-240V/50-60Hz
LED Watt	6W
LEDs	CREE
Driver	rac ² Drive
Lumens (3000K)	1405: 245 lm 1407: 240 lm
Beam Angle	120°
LED Color	3000K/4000K/6000K
Safety Class	Class I   
IP Rating	IP54   




1405



1407

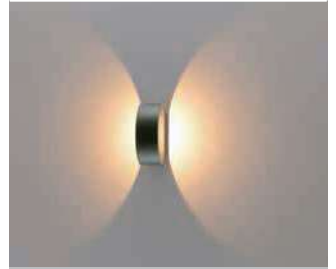

Material	Aluminium/Glass
Voltage	110-240V/50-60Hz
LED Watt	6W
LEDs	CREE
Driver	each model
Lumens (3000K)	240 lm
Beam Angle	120°
LED Color	3000K/4000K/6000K
Safety Class	Class I CE UL V
IP Rating	IP54 W A A




1402



1403

Material	1105: Aluminium/PC 1306: Aluminium/Glass
Voltage	110-240V/50-60Hz
LED Watt	1105: 8W 1306: 3W
LED Type	1105: SMD 3030
LEDs	1105: BRIDGELIX 1306: CREE
Driver	each model
Lumens (3000K)	1105: 290 lm 1306: 90 lm
Beam Angle	1105: 100° 1306: 90°
LED Color	3000K/4000K/6000K
Safety Class	Class I CE UL V
IP Rating	IP54 W A A










1105



1306









Material	Aluminium/Glass
Voltage	110-240V/50-60Hz
LED Watt	1214: 6W 1213: 2x6W
LEDs	CREE <small>waalens</small>
Driver	<small>waalens</small>
Lumens (3000K)	1214: 180 lm 1213: 360 lm
Beam Angle	120°
LED Color	3000K/4000K/6000K
Safety Class	Class I   
IP Rating	IP54   




1213




1214

Material	Aluminium/glass
Voltage	110-240V/50-60Hz
LED Watt	1207: 2x3W 1211: 2x2W
LED Type	1207: SMD 3535
LEDs	1207: BRIDGELUX 1211: CREE <small>waalens</small>
Driver	<small>waalens</small>
Lumens (3000K)	1207: 145 lm 1211: 150 lm
Beam Angle	1207: 107/60° 1211: 60°
LED Color	3000K/4000K/6000K
Safety Class	Class I   
IP Rating	IP54   



1211

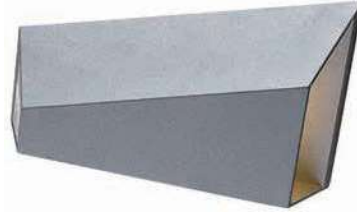

1207

