




103001M HYDROSTAR MINI 01 GU5.3

Small projector for outdoor installation on a façade/wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminium body and base, tempered safety glass, moulded silicone gasket and stainless steel screws. Built-in transformer 220-240V 50-60Hz, GU5.3 LED / halogen. IP55 rating.



- Material: high corrosion resistance die-cast copper-free aluminium body
- Coating: polyester powder coating with phosphochromating pre-finish
- GU5.3 base, MAX 50W
- Built-in toroidal transformer 220-240V 50-60Hz
- Stainless steel screws
- Silicone rubber gasket
- Tempered safety glass.

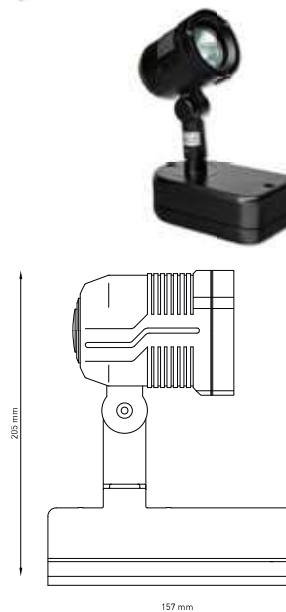


	LIGHT SOURCE	LIGHT COLOR	LIGHT BEAM OPTIONS	COLORS OPTIONS
50 WATT MAX – BASE GU5.3 220-240V 50-60HZ IP55 1.65 KG UNIT GROSS WEIGHT	 GU5.3 LED / HALOGEN	SEE BULB FEATURES	SEE BULB FEATURES	■ TEXTURED GREY □ MATT WHITE (ON REQUEST) ■ MATT BLACK (ON REQUEST)

103002M HYDROSTAR MINI 02 GU5.3

Small projector for outdoor installation on a façade/wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminium body and base, tempered safety glass, moulded silicone gasket and stainless steel screws. Built-in transformer 220-240V 50-60Hz, GU5.3 LED / halogen. IP55 rating.


- Material: high corrosion resistance die-cast copper-free aluminium body
- Coating: polyester powder coating with phosphochromating pre-finish
- GU5.3 base, MAX 50W
- Built-in toroidal transformer 220-240V 50-60Hz
- Stainless steel screws
- Silicone rubber gasket
- Tempered safety glass.

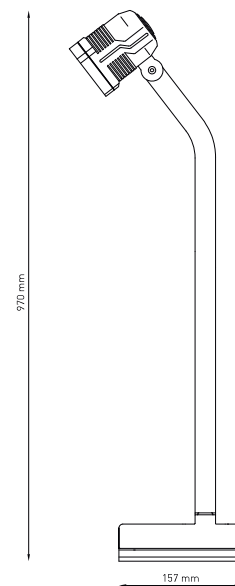

	LIGHT SOURCE	LIGHT COLOR	LIGHT BEAM OPTIONS	COLORS OPTIONS
50 WATT MAX – BASE GU5.3 220-240V 50-60HZ IP55 3.15 KG UNIT GROSS WEIGHT	 GU5.3 LED / HALOGEN	SEE BULB FEATURES	SEE BULB FEATURES	■ TEXTURED GREY □ MATT WHITE (ON REQUEST) ■ MATT BLACK (ON REQUEST)

103003M HYDROSTAR MINI 01 GU10

Small projector for outdoor installation on a façade/wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminium body and base, tempered safety glass, moulded silicone gasket and stainless steel screws. GU10 LED / halogen. IP55 rating.

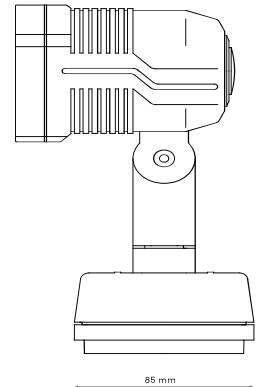

AC001
EARTH SPIKE
ON REQUEST

- Material: high corrosion resistance die-cast copper-free aluminum body
- Coating: polyester powder coating with phosphochromating pre-finish
- GU10 base, MAX 50W
- Stainless steel screws
- Silicone rubber gasket
- Tempered safety glass.



MOVABLE
355°




MOVABLE
100°

	LIGHT SOURCE	LIGHT COLOR	LIGHT BEAM OPTIONS	COLORS OPTIONS
50 WATT MAX 220-240V 50-60HZ IP55 0.75 KG UNIT GROSS WEIGHT	 GU10 LED / HALOGEN	SEE BULB FEATURES	SEE BULB FEATURES	■ TEXTURED GREY □ MATT WHITE (ON REQUEST) ■ MATT BLACK (ON REQUEST)

103004M HYDROSTAR MINI 02 GU10

Small projector for outdoor installation on a façade/wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminium body and base, tempered safety glass, moulded silicone gasket and stainless steel screws. GU10 LED / halogen. IP55 rating.

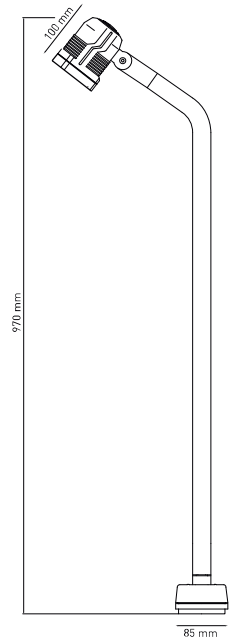

- Material: high corrosion resistance ie-cast copper-free aluminum body
- Coating: polyester powder coating with phosphochromating pre-finish
- GU10 base, MAX 50W
- Stainless steel screws
- Silicone rubber gasket
- Tempered safety glass.



MOVABLE
355°




MOVABLE
100°

	LIGHT SOURCE	LIGHT COLOR	LIGHT BEAM OPTIONS	COLORS OPTIONS
50 WATT MAX 220-240V 50-60HZ IP55 2.20 KG UNIT GROSS WEIGHT	 GU10 LED / HALOGEN	SEE BULB FEATURES	SEE BULB FEATURES	■ TEXTURED GREY □ MATT WHITE (ON REQUEST) ■ MATT BLACK (ON REQUEST)



103005 HYDROSTAR MEDIUM 01 LED

Projector for outdoor installation on a façade/wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminium body and base, tempered safety glass, moulded silicone gasket and stainless steel screws. built-in LED driver 220-240V 50-60Hz, with 5 CREE XP-G2 LED. IP65 rating.

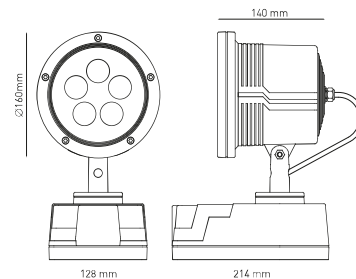

Energy Label A++



AC001
EARTH SPIKE
ON REQUEST

- Material: high corrosion resistance die-cast copper-free aluminum body
- Coating: polyester powder coating with phosphochromating pre-finish
- NR, 5 x 1.5W CREE "XP-G2" LED
- Electronic transformer 220/240V 50/60Hz included
- Stainless steel screws
- Silicone rubber gasket
- Tempered safety glass.


8 WATT
220-240V 50-60HZ ELECTRONIC
IP65
3.30 KG UNIT GROSS WEIGHT

LIGHT SOURCE	LED COLOR*	LIGHT BEAM OPTIONS	LUMEN OUTPUT (lm)	LUMINOUS EFFICACY (lm/w)	COLORS OPTIONS
HIGH-POWER LED	3,000°K WARM-WHITE	10°	720	90.00	<input type="checkbox"/> TEXTURED GREY <input type="checkbox"/> MATT WHITE (ON REQUEST) <input type="checkbox"/> MATT BLACK (ON REQUEST)
		30°	684	85.50	
		45°	650	81.25	
	6,000°K COLD-WHITE	10°	750	93.75	
		30°	713	89.13	
		45°	677	84.63	

* OTHER LIGHT COLORS AVAILABLE ON REQUEST: ○ 4,000°K NEUTRAL-WHITE, ● BLUE


103011 HYDROSTAR MEDIUM 02 LED

Projector for outdoor installation on a façade/wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminium body and base, tempered safety glass, moulded silicone gasket and stainless steel screws. built-in LED driver 220-240V 50-60Hz, with 5 CREE XP-G2 LED. IP65 rating.

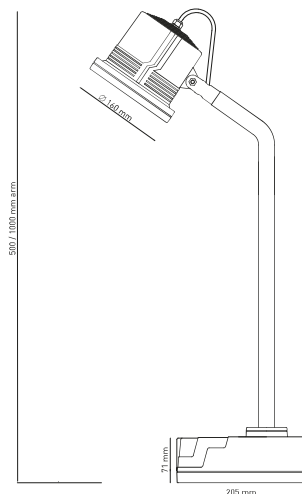

Energy Label A++

- Material: high corrosion resistance die-cast copper-free aluminum body
- Coating: polyester powder coating with phosphochromating pre-finish
- NR, 5 x 1.5W CREE "XP-G2" LED
- Electronic transformer 220/240V 50/60Hz included
- Stainless steel screws
- Silicone rubber gasket
- Tempered safety glass.



8 WATT
220-240V 50-60HZ ELECTRONIC
IP65
3.50 KG UNIT GROSS WEIGHT

LIGHT SOURCE	LED COLOR*	LIGHT BEAM OPTIONS	LUMEN OUTPUT (lm)	LUMINOUS EFFICACY (lm/w)	COLORS OPTIONS
HIGH-POWER LED	3,000°K WARM-WHITE	10°	720	90.00	<input type="checkbox"/> TEXTURED GREY <input type="checkbox"/> MATT WHITE (ON REQUEST) <input type="checkbox"/> MATT BLACK (ON REQUEST)
		30°	684	85.50	
		45°	650	81.25	
	6,000°K COLD-WHITE	10°	750	93.75	
		30°	713	89.13	
		45°	677	84.63	

* OTHER LIGHT COLORS AVAILABLE ON REQUEST: ○ 4,000°K NEUTRAL-WHITE, ● BLUE